GFOA 2027 NEW ORLEANS

Government Finance Officers Association


121st Annual Conference

Exhibit Dates: June 6–8, 2027 | Hall B

GFOA ANNUAL MEETING 2027

06/06/27 - 06/09/27

ERNEST N MORIAL CONVENTION CENTER - HALL B1-B2 - NEW ORLEANS, LA

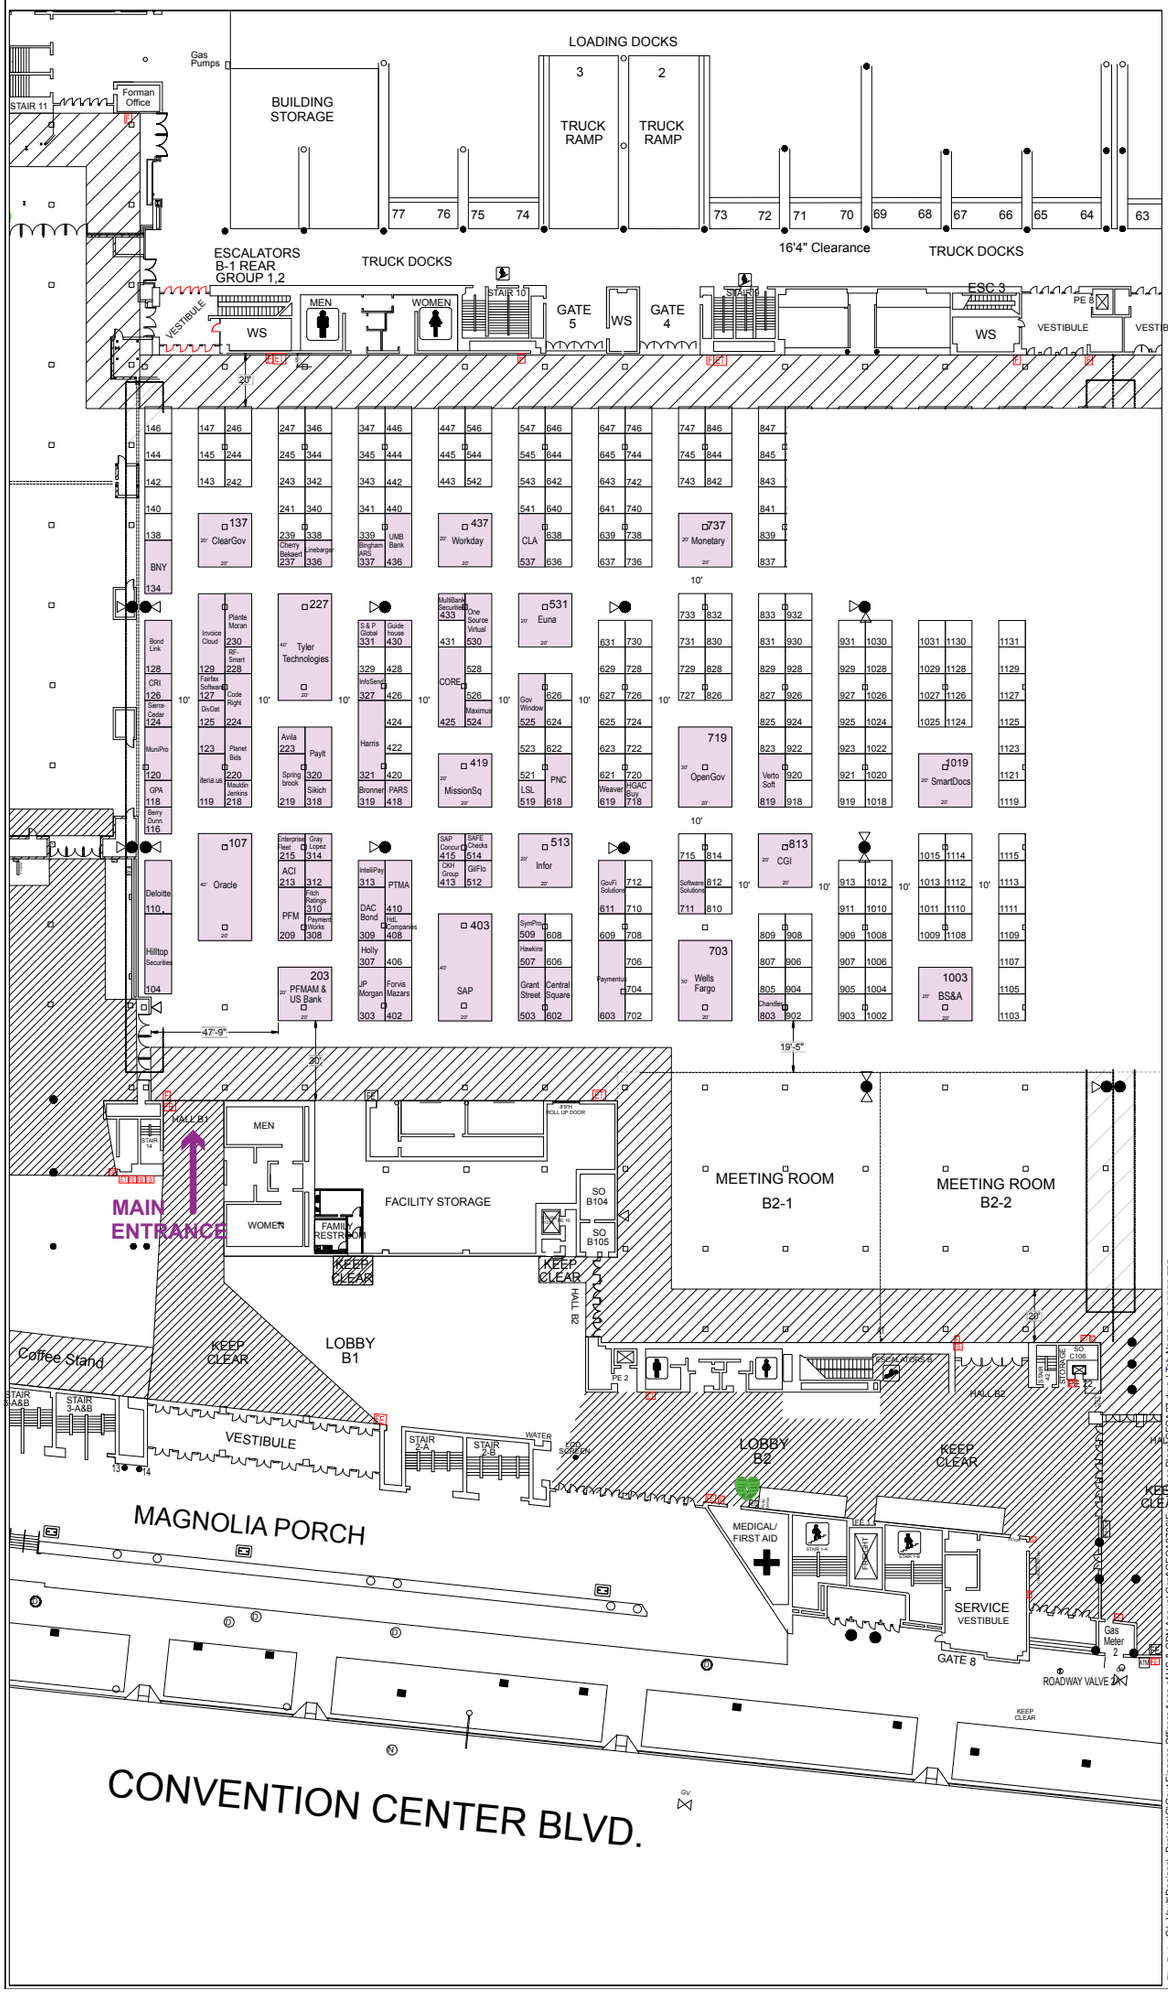

REVISION
Date: 8/24/2026
By: TRACY WALKER

BOOTH COUNT

Inventory as of 08/24/2026

Dimension 10'x10'	Size	Qty	SqFt	Rented	Available
	100	489	48,900	0	489
Totals:		489	48,900	0	489

BUILDING LEGEND

Exhibit Hall Utilities:

- FLOOR BOXES
  30ft. on center, one 100 amp 120/208 volt, 3 phase, 5 wire receptacle four 20 amp, 120 volt, 1 phase, 3 wire receptacles telephone connection and intercommunication Drain, 3" and Water
- FLOOR BOXES
  All Floor Boxes have Water
- FLOOR BOXES (Hall F - J)
  Communication/Drain 100amp/208 or 4 20amp circuit
- FLOOR BOXES (Hall G - J)
  Communication/Drain 100amp/208 with 12 20amp circuit

TELECOM-
25 pair, category 3 telecommunications cable.


CABLE TV
Coaxial cable connection to local cable provider.

△ ELECTRICAL, HALLS A through E -
In truss above column line's running down the center of each hall - continuous 1,000 amp (minimum), 480-volt, 3-phase, 3-wire plug-in buss duct.
△ Above first and last column in each service way column line, two 400-amp and two 100-amp, 120/208-volt receptacles.

ELECTRICAL, HALL F -
Continuous 1,000-amp (minimum), 480-volt, 3-phase 3-wire plug-in buss duct in all serviceways.
Continuous 600-amp 120-208-volt, 5-wire plug-in buss duct on first and last service way in hall.

△ ELECTRICAL, HALLS G through I -
In truss above column line(s) running down the center of each hall - continuous 800-amp (minimum), 480-volt, 3-phase, 3-wire plug-in buss duct capable of providing combined
△ 1,600-amp, 480-volt, 3-phase, 3-wire plug-in service. Above first and last column, two 400-amp and four 100-amp, 210/208-volt receptacles.

COLUMNS



IMPORTANT

ALL Island Booths must have an electrical floor box within the perimeter of the booth.

ALL in line 10' x 10' bays must have an electrical box somewhere along the back wall.

Floor Boxes in aisles cannot be used.
Overhead electrical increases the electric rates by 50%.

ALL AISLES SHOULD BE 10' UNLESS OTHERWISE APPROVED IN ADVANCE

20' FRONT & BACK AISLE IS MANDATORY

NOTE
HANG POINTS & WEIGHT MAY NEED TO BE ADDED TO ACCOMODATE BANNER SIZE @ CLIENTS EXPENSE.

DRAWING INFORMATION

Passport Line Item Number:
#17427755
Facility:
ERNEST N MORIAL CONVENTION CENTER
Facility Location:
HALL B1-B2
City & State:
NEW ORLEANS, LA
Scale: CUSTOM
Project #: 542808
Acct. Sales: Gene Thomas
Acct. Mgmt.: Shanae Bullard
Started: 8/18/2026
Started By: TRACY WALKER
Prod. Branch: New Orleans

File Path: C:_VaultDesigns_Projects\GOovt Finance Officers Assn of US & CDN Annual Conf\GFOA2706E\Floor Plans\GFOA27.dwg | Tab Name: 17427755 FPD

Freeman.

Disclaimer - This floor plan is preliminary and subject to change pending review and official approval by all authorities having jurisdiction. Every effort has been made to ensure the accuracy of all information contained on this floor plan. However, no warranties, either expressed or implied, are made with respect to this floor plan. If the location of building columns, utilities or other architectural components of the facility is a consideration in the construction or usage of an exhibit, it is the sole responsibility of the exhibitor to physically inspect the facility to verify all dimension and locations.
© Copyright 2026, Freeman Co. All rights reserved.

Confidential and Proprietary - the information contained herein is the proprietary information of Freeman and by accessing the information, the recipient agrees to keep the information confidential and not disclose it to any third party without the prior consent of Freeman. Recipient also agrees to only use the information for its internal evaluation purposes and for no other purpose, without the prior consent of Freeman.